


LK1942U68P

Width: 600 mm
Depth: 800 mm

Construction Drawings

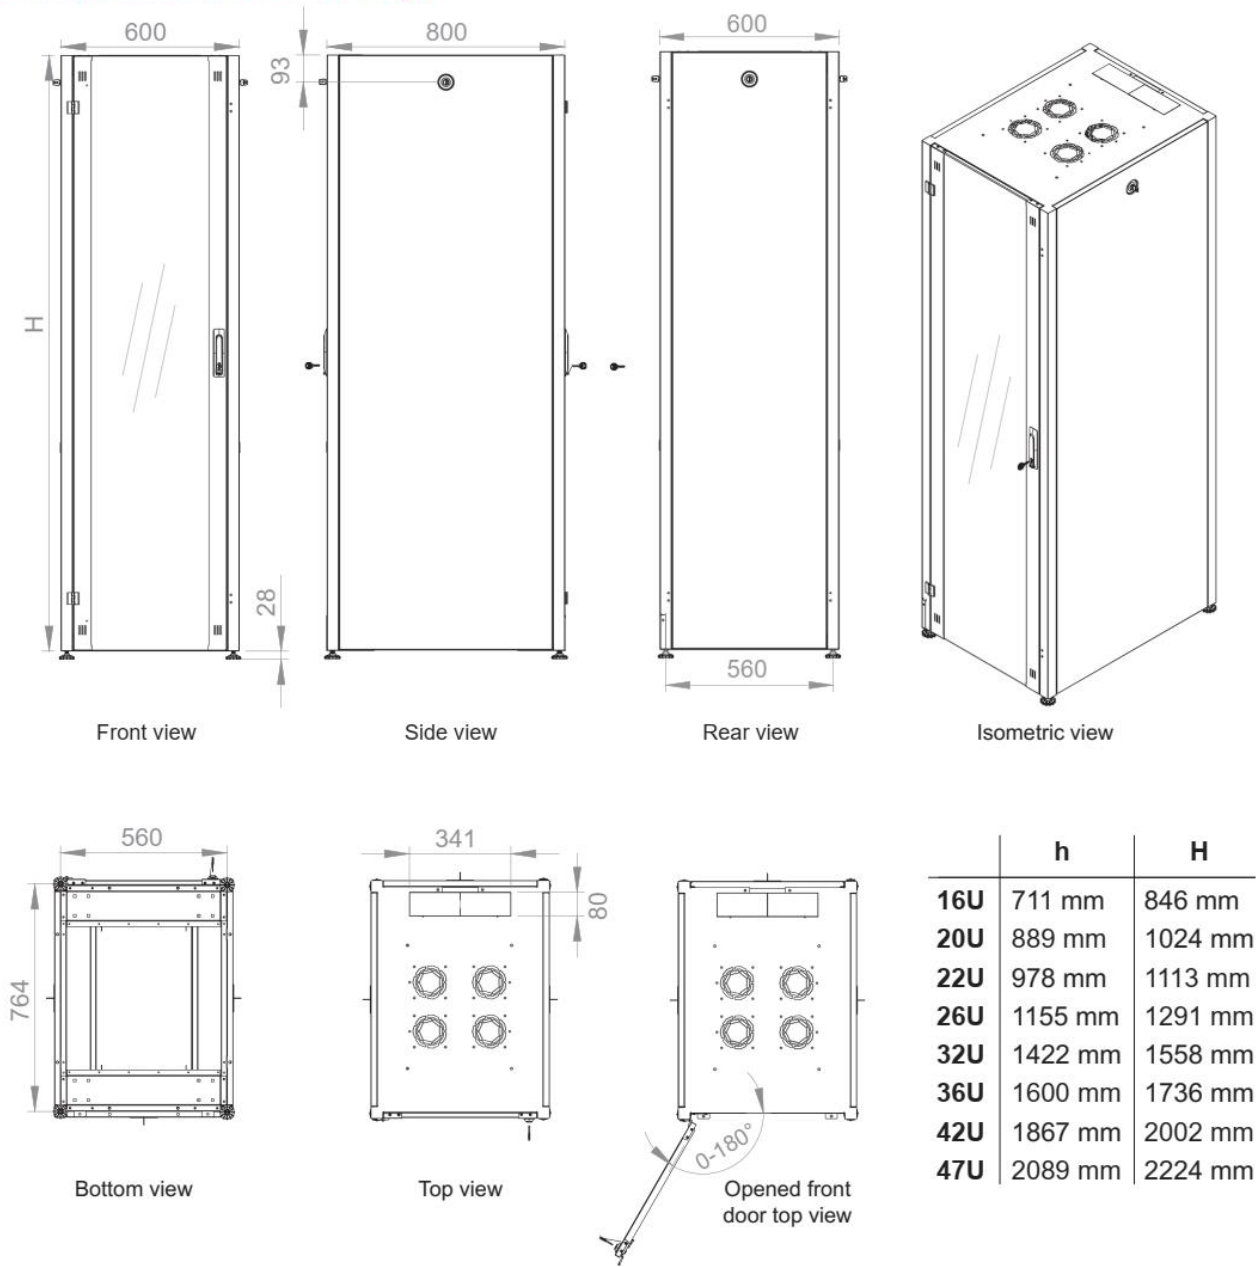

	h	H
16U	711 mm	846 mm
20U	889 mm	1024 mm
22U	978 mm	1113 mm
26U	1155 mm	1291 mm
32U	1422 mm	1558 mm
36U	1600 mm	1736 mm
42U	1867 mm	2002 mm
47U	2089 mm	2224 mm

Part Definition	Material Quality	Material Thickness (mm)	Shipment Configuration
Frame and All Connection Profiles	EN 10305-5 Steel Tubes for Precision Applications	0,6 mm	2 Frame and 4 Profiles
Glass Door	EN 12150-1 Tempered Secure Glass	4 mm	1
19" Equipment Mounting Rails	DIN EN 10130-DC-01-6112 CRS	1,5 mm	4
Side and Rear Panels	DIN EN 10130-DC-01-6112 CRS	0,6 mm	3